AD-A012 146

MEASURING SOIL PROPERTIES IN VEHICLE MOBIL-
ITY RESEARCH.   REPORT 7.   BEHAVIOR OF FINE-
GRAINED SOILS UNDER HIGH-SPEED TIRE LOADS

Gerald W. Turnage

Army Engineer Waterways Experiment Station
Vicksburg, Mississippi

June 1975

202102

TECHNICAL REPORT NO. 3-652

MEASURING SOIL PROPERTIES IN VEHICLE MOBILITY RESEARCH

Report 7

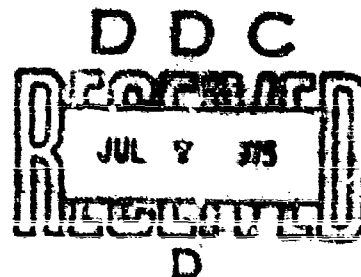## BEHAVIOR OF FINE-GRAINED SOILS UNDER HIGH-SPEED TIRE LOADS

by

Gerald W. Turnage

Mobility and Environmental Systems Laboratory
U. S. Army Engineer Waterways Experiment Station
P. O. Box 631, Vicksburg, Miss. 39180

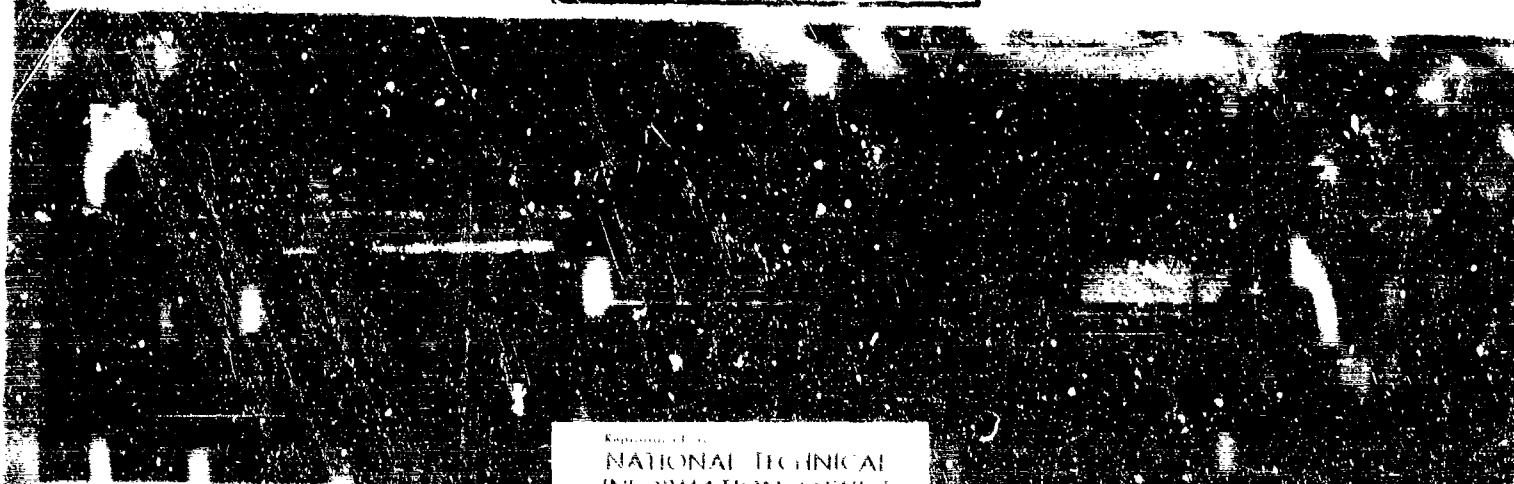June 1972

Report 7 of a Series

Approved For Public Release; Distribution Unlimited

D D C

JUL 7 1975

RECEIVED

D

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Report No. 3-652	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) MEASURING SOIL PROPERTIES IN VEHICLE MOBILITY RESEARCH; Report 7, BEHAVIOR OF FINE-GRAINED SOILS UNDER HIGH-SPEED TIRE LOADS		5. TYPE OF REPORT & PERIOD COVERED Report 7 of a series
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Gerald W. Turnage		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U. S. Army Engineer Waterways Experiment Station Mobility and Environmental Systems Laboratory P. O. Box 631, Vicksburg, Miss. 39180		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS Project 4A061101A91D
11. CONTROLLING OFFICE NAME AND ADDRESS Assistant Secretary of the Army (R&D), Department of the Army Washington, D. C. 20310		12. REPORT DATE June 1975
		13. NUMBER OF PAGES 68
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

DDC
JUL 7 1975
RECEIVED
D

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Fine-grained soils
Soil properties
Tire loads
Vehicle mobility

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This study examined the effects of wheel speed on the performance in fine-grained soils of single pneumatic tires, full-size wheeled vehicles, and a prototype aircraft under several tire operational modes. Results from powered-wheel single-tire tests conducted at WES showed that the dimensionless clay-tire numeric $N_{cl} = (C_s bd/W) \times (\delta/h)^{1/2} \times 1/[1 + (b/2d)]$, where C_s = standard cone index, b = tire section width, d = tire diameter, W = wheel load, and δ/h = tire deflection ratio, can be used to describe tire performance (Continued)

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE

PRICES SUBJECT TO CHANGE

20. ABSTRACT (Continued).

at speeds to at least 18 ft/sec if the value of C_s in N_{cl} is adjusted to reflect viscouslike soil strength behavior caused by tire-soil interaction. Results from WES speed tests of five prototype wheeled vehicles in the field indicated that the same velocity-adjusted numeric as above (except that rating cone index RCI replaces cone index C_R) is closely related to the soil motion resistance coefficient R_s/W_v. Data from tests conducted for the U. S. Air Force showed that for one particular combination of aircraft, running gear, and wing-flap setting, a clay-tire numeric, $N_{c0} = (C_s bd/W) \times (\delta/h)^{1/2}$, is closely associated with the percent increase in takeoff distance required on unsurfaced clay runways as compared to that on a paved runway. From another study conducted for the Air Force, data revealed that a relation between the dimensionless drag coefficient and the Reynolds number (modified from fluid mechanics to fit the clay-tire situation) can be used to describe the combined influence of viscouslike and inertial changes in soil strength on the drag of a free-rolling tire at speeds to about 150 ft/sec. For the braked-wheel operational mode, a simple method of predicting drag ratio (D/W) was developed on the basis of a reasonably stable, linear relation that exists between D/W and the rut depth coefficient (r/d) for wheel speeds to about 150 ft/sec.

1

PREFACE

The study reported herein was funded by Department of the Army Project 4A061101A91D, "In-House Laboratory Independent Research," under the sponsorship of the Assistant Secretary of the Army (R&D). The study was conducted during 1973-1974.

The project was conceived by Mr. G. W. Turnage, Mobility Research and Methodology Branch (MRMB), Mobility Systems Division (MSD), Mobility and Environmental Systems Laboratory (MESL), at the U. S. Army Engineer Waterways Experiment Station (WES). Most of the data analyzed in this report were obtained from tabulations in the published literature. Also presented are some hitherto unreported data from a previous test program accomplished by personnel of MRMB and the Mobility Investigations Branch (MIB), MESL. This study was conducted under the general supervision of Messrs. W. G. Shockley, Chief of MESL, and A. A. Rula, Chief of MSD, and under the direct supervision of Mr. C. J. Nuttall, Jr., Chief of MRMB. The report was prepared by Mr. Turnage.

Special acknowledgment is made to Dr. E. T. Selig and Mr. C. T. Wang, State University of New York at Buffalo, Buffalo, New York, for furnishing the author with a corrected tabulation of data from tests conducted at the NASA Langley Research Center, Landing Loads Test Track, and for their permission to use these data.

BG E. D. Peixotto, CE, and COL G. H. Hilt, CE, were Directors of WES during the conduct of the study and the preparation of the report. Mr. F. R. Brown was Technical Director.

CONTENTS

CONVERSION FACTORS, U. S. CUSTOMARY TO METRIC (SI)
UNITS OF MEASUREMENT

U. S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	By	To Obtain
inches	2.54	centimetres
feet	0.3048	metres
square inches	6.4516	square centimetres
square feet	0.09290304	square metres
pounds (mass)	0.4535924	kilograms
pounds (force)	4.448222	newtons
tons (mass)	907.1847	kilograms
pounds (force) per square inch	6.894757	kilopascals
inches per minute	2.54	centimetres per minute
feet per second	0.3048	metres per second
knots (international)	0.5144444	metres per second
miles per hour (U. S. Statute)	1.609344	kilometres per hour